



EGS5212FP



Key Features

- 8 Gigabit PoE+ Ports, IEEE802.3at/af support
- 2 Gigabit uplink ports and 2 SFP slots for additional connectivity
- Internal Power Supply with 130 W PoE Budget
- IGMP and MLD snooping provides advanced multicast filtering
- IEEE802.3ad Link Aggregation
- STP/RSTP/MSTP
- Access Control List/ Port Security
- IEEE802.1X and RADIUS Authentication
- RMON
- SNMP v1/v2c/v3
- Voice VLAN for fast and reliable deployment of VoIP
- Solid performance with non-blocking architecture with 24 Gbps switching capacity
- Supports PoE+ on all ports, providing flexibility to add power-hungry devices such as video phone, IP camera and wireless APs
- Energy Efficient Ethernet (IEEE802.3az) support for better energy saving when more IEEE-compliant end devices are available in the market
- Advanced QoS with IPv4/IPv6 ingress traffic filtering (ACLs) and prioritization
- Easy to manage via Web-Based Management GUI for switch deployment
- Standard-based technology, ensuring interoperability with any standard-based devices in the existing network
- Dual firmware images, improving reliability and uptime for your network

8-Port Gigabit PoE+ L2 Managed Switch

with 2 Gigabit Uplink Ports & 2 Dual-Speed SFP

EnGenius Layer 2 Managed PoE+ Switch Series: cost-effective, simple-to-use networking solutions for small-to-medium businesses

The EGS5212FP is a full featured Gigabit Ethernet switch with comprehensive Layer 2 switching capabilities and PoE+ support. It provides 8 Gigabit ports that support IEEE802.3at/af PoE+, two 1 GbE connectivity for uplinks that allow SMBs to deliver higher bandwidth for congestion relief and 2 SFP slots for fiber transceivers that can extend the reach of the network beyond the limitation of Ethernet cabling. With rich Layer 2 management features, the EGS5212FP allows quick deployment and simplified maintenance as well as seamless upgrades, making it the ideal networking solution for businesses looking for the best combination of features, performance and value.

Equipped with Rich Layer 2 Features

The EnGenius Layer 2 switch includes IGMP Snooping, MLD Snooping, Port Mirroring, Rapid Spanning Tree, Multiple Spanning Tree, Spanning Tree, VLAN group, Voice VLAN, ACL, 802.1X port security, SNMP v1/v2c/v3 and IEEE802.3ad Link Aggregation Control Protocol (LACP). The EGS5212FP includes 8 Gigabit PoE (10/100/1000 Mbps) ports, two 1 GbE connectivity for uplinks that allow SMBs to deliver higher bandwidth for congestion relief and two SFP (copper/hot-swappable small form-factor pluggable) Gigabit ports for optional fiber connectivity. IT managers or VARs who are expanding network deployments for businesses, schools, resorts and hotels, or other expansive venues can expect superior performance and reliability at a price point that is much more attractive than from larger, more enterprise-focused network brands.

This high-performing switch also features a non-blocking wire-speed architecture with a 24 Gbps switching capacity for maximum data throughput. The IEEE 802.3x Flow Control function allows servers to directly connect to the switch for fast, reliable data transfer. Network maintenance features include Spanning Tree and Cable Diagnostics.

Easy Network Management and Visibility

This EnGenius Layer 2 Switch is designed for easy network management and can quickly be added to an existing rack of other branded L2 and L3 switches. Configuring the switch is made through an intuitive and user-friendly Web interface for quick and easy management. The EnGenius L2 switch also includes SNMP (v1, v2 and v3) to collect and track data to monitor network health, manage devices, and more easily enforce critical IT controls and policies. The switch's Link Layer Discovery Protocol (LLDP) feature allows it and other network devices connected to it to announce and display their identity and capabilities on the local network, which helps IT managers better manage, troubleshoot or correct issues that may arise on the network.

VLAN and Voice VLAN

The EGS5212FP provides support 802.1Q VLANs for improved convergence and bandwidth utilization. The switch automates the process of setting up VoIP devices on a network. Voice VLAN guarantees clear quality and efficient transmission for all voice communications. VLANs also provide a means of securing each broadcast domain, segregating them from each other. VLANs can be configured to segment departmental resources. VLANs implemented on an SMB network help to restrict access to sensitive information from one department to another.

Multicast Support

The EGS5212FP supports IGMP Snooping, MLD Snooping, and VLAN for multicast applications. By passively snooping IGMP packets transferred between the switch and the IP multicast host, registration information is recorded and sorted into multicast groups. The switch can then intelligently forward traffic to only those ports that request multicast traffic. MLD Snooping enhances efficiency in selective distribution by forwarding IPv6 multicast data to receiving ports, rather than flooding all ports in a VLAN.

IGMPv1—Defined in RFC 1112. An explicit join message is sent to the switch, but a timeout is used to determine when hosts leave a group.

IGMPv2—Defined in RFC 2236. Adds an explicit leave message to the join message so that the switch can more easily determine when a group has no interested listeners on a LAN.

IGMPv3—Defined in RFC 3376. Support for a single source of content for a multicast group.

QoS for Smoother Video Conferences and Clearer Phone Calls

Priority queuing ensures high-priority traffic gets delivered efficiently, even during congestion from high traffic bursts. The ability to prioritize traffic ensures quality of latency-sensitive services and applications despite increasing traffic loads. For mission critical environments, the EGS5212FP supports 802.1D, 802.1w and 802.1s Spanning Tree Protocols (STP). STP allows you to configure the switch with a redundant backup bridge path, so transmission and reception of packets can be guaranteed in the event of any failed switch on the network. To help streamline networks, 802.1p Priority Tagging places a priority tag in a specified frame placing it in a priority queue once received and enabling it to be prioritized ahead of other frames. IEEE 802.1p enables administrators to assign and designate traffic priority. This process helps applications such as VoIP and video conferencing to be delivered clear and jitter-free.

Making the Network More Secure


The EGS5212FP also supports 802.1X port-based authentication, so IT managers can authenticate clients via external RADIUS servers. In addition, the Access Control List (ACL) feature enhances network security and protects the network by screening traffic from unauthorized MAC or IP addresses.




Energy Saving

This EnGenius Layer 2 Switch is capable of conserving power without sacrificing operational performance. With the Energy Efficient Ethernet (EEE) standard, the network will automatically decrease its power usage when traffic is low with no setup required. The PoE Management feature lets IT managers control the PoE on each port so that unnecessary power consumption can be saved during off hours. The switch can also detect the length of connected cables to automatically reduce power usage on shorter cable connections.

Power over Ethernet (PoE)

With a total power budget of 130 Watts for the EGS5212FP, customers can choose to plug in up to eight 802.3at/af IP-based devices. Power-over-Ethernet (PoE) optimizes the installation and power management of network devices such as wireless Access Points (APs), Voice over IP (VoIP) phones, and IP-based surveillance cameras. In addition, the EGS5212FP's Power-over-Ethernet (IEEE 802.3at/af) capabilities reduce installation time and costs for many new network productivity devices. Free your wireless AP deployments and IP cameras from the restrictions of power outlet proximity using a standard Cat 5 cable.

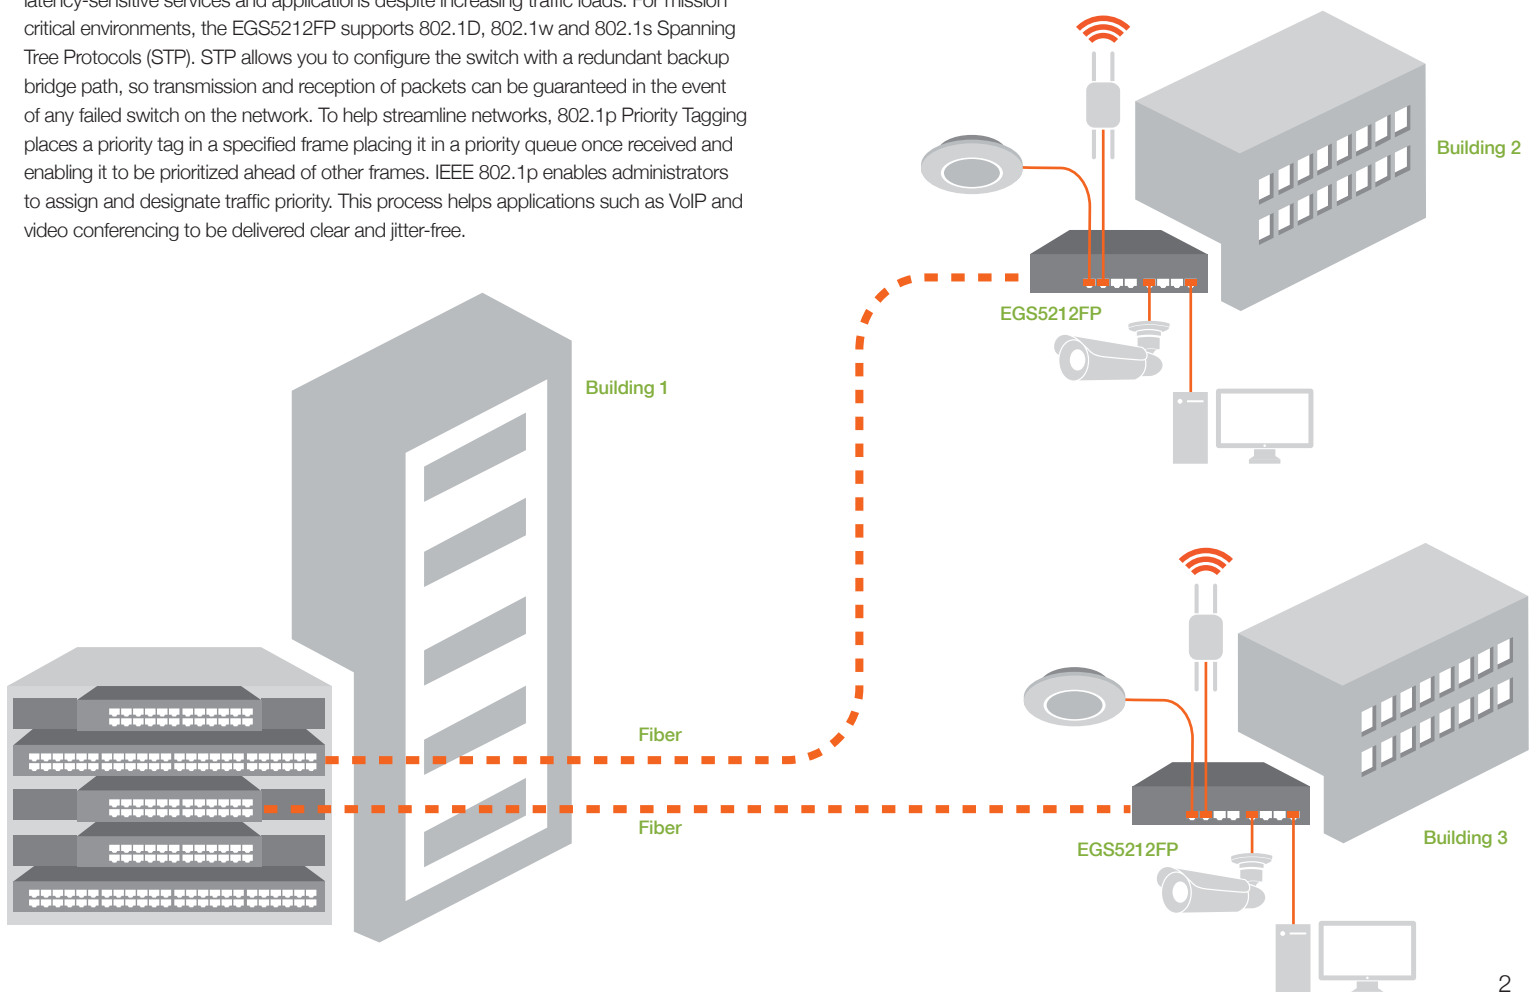

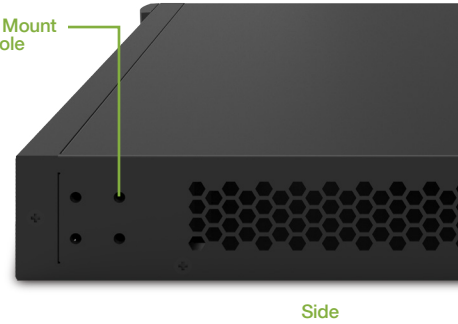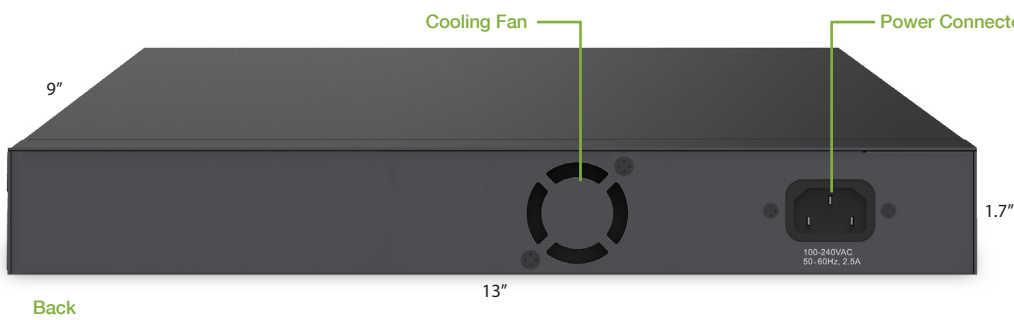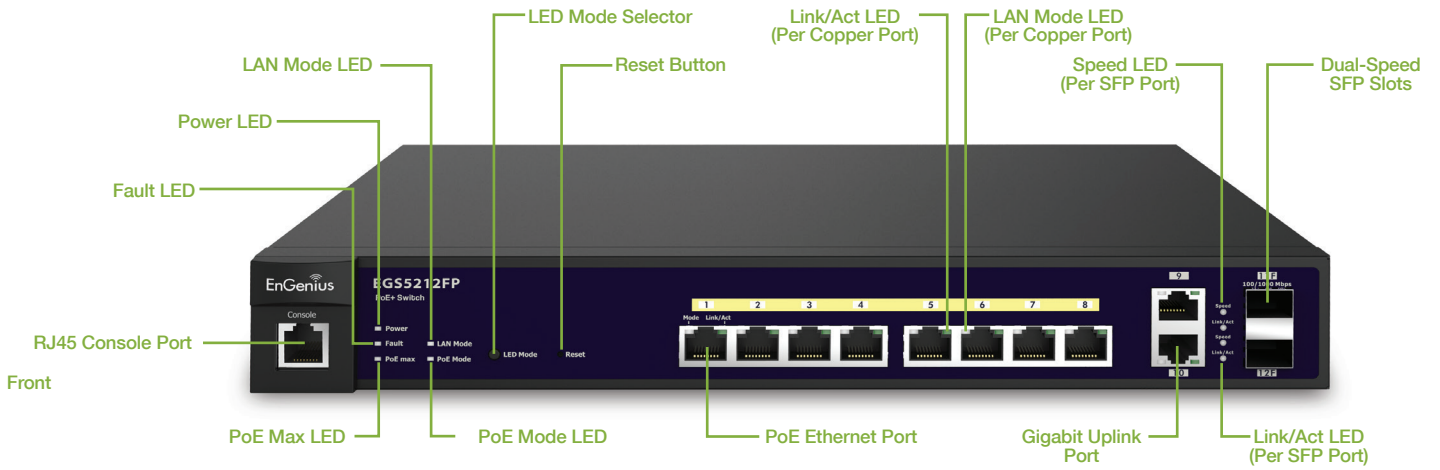

Specifications

Standards

General Features

Switching Capacity: 24Gbps
 Forwarding Mode: Store and Forward
 SDRAM: 256MB
 Flash Memory: 32MB

Port Functions

10 10/100/1000Mbps Ports
 2 100/1000Mbps SFP Slots
 1 RJ45 Console Port

PoE Capability

PoE Standard: supports IEEE 802.3at/af
 PoE Capable Ports: Port 1-8 output up to 30W
 Total PoE Power Budget: 130Watts

LED Indicators

Device

| | | |
|--------------|--------------|-------------|
| Power LED | Fault LED | PoE Max LED |
| LAN Mode LED | PoE Mode LED | |

Copper Ports

| | |
|--------------|----------|
| LAN/PoE Mode | Link/Act |
|--------------|----------|

SFP Ports

| | |
|-------|----------|
| Speed | Link/Act |
|-------|----------|

L2 Features

IEEE802.3ad Link Aggregation
 Port Mirroring

Spanning Tree Protocol

802.1D Spanning Tree (STP)
 802.1w Rapid Spanning Tree (RSTP)
 802.1s Multiple Spanning Tree (MSTP)

IGMP Snooping v1/v2/v3

IGMP Fast Leave

MLD Snooping

VLAN Group

Voice VLAN

Queue

| | |
|------------------------------|----------------------------|
| CoS based on 802.1p priority | CoS based on physical port |
| CoS based on TOS | CoS based on DSCP |

IEEE802.1X Port-based Access Control

IEEE802.1X Guest VLAN

Port Security

Storm Control

Port Isolation

Attack Prevention

Access Control List (ACL)

| PoE Management | |
|------------------------------|---------------------------|
| Power on/off per port | Power class configuration |
| Power feeding with priority | User define power limit |
| SSH Server | |
| Telnet Server | |
| TFTP Client | |
| BootP/DHCP Client | |
| SNMP v1/v2c/v3 support | |
| TFTP Upgrade | |
| Command Line Interface (CLI) | |
| SNTP | |
| RMONv1 | |
| SYSLOG | |
| Cable Diagnostic | |

| MIB Support | | | |
|--------------------|---------|---------|---------|
| RFC1213 | RFC1493 | RFC1757 | RFC2674 |

Environmental & Mechanical

Temperature Range

Operating: 32°F to 132°F / 0 to 50°C

Storage: -40 to 158°F / -40 to 70 °C

Humidity

5 - 95% non-condensing

Weights & Measures

Dimension (W x D x H): 13" x 9" x 1.7" / 330 mm x 230 mm x 44 mm